

03-02-00

Attorney's Docket No.:
067575.0104

7c715 U.S. PTO
09/515338
02/29/00

PATENT

A

Express Mail No.: EL501047294US

PATENT APPLICATION

Attorney Docket No.: 067575.0104

First Named Inventor: J. Larry Summers, et al
(Or Application Identifier)

TRANSMITTAL FOR U.S. PATENT APPLICATION
UNDER 37 C.F.R. § 1.53(b)

Box Patent Application
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application
entitled: INTERNET-ENABLED CONFERENCING SYSTEM AND METHOD
ACCOMMODATING PSTN AND IP TRAFFIC

The enclosed application is:

x Original

Enclosed are:

x Specification, Claims and Abstract (38 Total Pages)
x Drawing(s) (7 Total Sheet(s) of x Formal Informal)
x Combined Declaration and Power of Attorney (Unsigned) (5
Total Pages)

 Newly executed (original or copy)

x Verified Statement Claiming Small Entity (Unsigned)

 An Assignment of the invention to eMeeting.net is attached.
A separate cover sheet in compliance with 37 C.F.R. § 3.28
and § 3.31 is included with an Assignment recordal fee of
\$ 40.00 pursuant to 37 C.F.R. § 1.21(h).

x Return Receipt Postcard

Applicant is a ___ large X small entity.


FEE CALCULATION (SMALL ENTITY)					FEE
	Number		Number Extra	Rate	Basic Fee
Total Claims:	56	-20 =	36	X \$ 9.00 =	\$ 345.00
Independent Claims	6	- 3 =	3	X \$39.00 =	\$ 117.00
TOTAL FILING FEE =					\$ 786.00

___ Enclosed is a check in the amount of \$_____ for fees.

X Please charge the fee of \$ 786 required by this paper to Deposit Account No. 02-0384 of BAKER BOTTS L.L.P. A duplicate copy of this sheet is enclosed.

Respectfully submitted,

BAKER BOTTS L.L.P.
Attorneys for Applicants



Christopher W. Kennerly
Reg. No. 40,675
February 29, 2000

Correspondence Address:
Christopher W. Kennerly, Esq.
Baker Botts L.L.P.
2001 Ross Avenue
Dallas, Texas 75201-2980
Telephone: (214) 953-6812
Facsimile: (214) 953-6503

CWK/bt

Applicant or Patentee: J. Larry Summers, et al.

Attorney's Docket 067575.0104

Serial or Patent No.

Filed or Issued: February 29, 2000

Title: **INTERNET-ENABLED CONFERENCING SYSTEM AND
METHOD ACCOMMODATING PSTN AND IP TRAFFIC**

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(e)) -- SMALL BUSINESS CONCERN**

I hereby declare that I am an official of the small business concern empowered to act on behalf of the concern identified below:

Name of Small Business Concern: eMeeting.net, Inc.

Address of Small Business Concern: 14850 Venture Drive, Dallas, Texas 75234

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled **INTERNET-ENABLED CONFERENCING SYSTEM AND METHOD ACCOMMODATING PSTN AND IP TRAFFIC**, by inventor(s) J. Larry Summers, Paul D. Harmon and Trey H. Smith, described in the specification filed herewith.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e):

NONE

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or my maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name of Person Signing:

J. Larry Summers

Title of Person if other than owner:

President

Address of Person Signing:

14822 LeGrande Drive, Addison, Texas 75001

Signature: _____

Date: _____

1

INTERNET-ENABLED CONFERENCING SYSTEM AND METHOD
ACCOMMODATING PSTN AND IP TRAFFIC

RELATED APPLICATIONS

This application is related to copending U.S. Application No. 09/____, filed February 29, 2000 by J. Larry Summers, Paul D. Harmon, and Trey H. Smith, for an Internet-enabled conferencing system and method accommodating PSTN and IP traffic.

TECHNICAL FIELD OF THE INVENTION

This invention relates in general to the field of communications and in particular to an Internet-enabled conferencing system and method accommodating PSTN and IP traffic.

5

BACKGROUND OF THE INVENTION

Communications needs continue to expand on a global scale. With the growing demand for communications, there is a concurrent expansion in the demand for audio, video, and combined audio and video conferencing. The ability for multiple parties to communicate with one another is very much a requirement for modern business. As individuals and organizations seek to decrease their costs and improve productivity, identifying relatively inexpensive, reliable, and effective conferencing solutions has become increasingly important. This is particularly true considering the recent rise in importance of packet-based audio, video, and other communications relying on Internet Protocol (IP).

Multi-party bridging provides a foundation for conferencing and has existed for some time in the form of analog ("dumb") bridges handling public switched telephone network (PSTN) traffic, which require operator services or other appropriate intelligent front end capability. The number of conferees is typically limited to eight or fewer. Similar limitations exist for prior conferencing systems for handling IP traffic. Such systems are host-based, with bridging being performed using a general purpose central processing unit (CPU) within a "Media Server" or other computer system, and provide limited teleconferencing capacity. In many cases, a "push to talk" control key must be manipulated. Desirable features such as echo cancellation, automatic gain control, and simultaneous speaking are very difficult to implement. Furthermore, due to the nature of IP networks, packets are often lost or delayed, distorting voice audio or freezing an image on the viewing screen. Even in managed IP networks, congestion may cause temporary data loss for one or more conferees. Such quality of service issues must be carefully considered in assessing the usefulness of conferencing systems expected to handle IP traffic. While possibly adequate for casual use, such systems are typically not sufficiently robust for important business communications.

To deploy a traditional PSTN conference bridge within an IP network requires a separate "gateway" to convert the IP packets carrying conference audio and video into digital or analog telephone traffic before routing it to the bridge. In addition to other deficiencies noted above with respect to existing pure PSTN or pure IP solutions, such gateways must be paid for and managed. As a result of these and other deficiencies,

previous techniques are often inadequate to meet conferencing requirements of many business and other users.

067575.0103

SUMMARY OF THE INVENTION

According to the present invention, disadvantages and problems associated with previous conferencing techniques are substantially reduced or eliminated.

According to one embodiment of the present invention, a system for scheduling a conference between callers includes a database that stores scheduling information indicating at least a start time, a duration, and a maximum number of callers for one or more scheduled conferences, the scheduling information reflecting available conferencing resources. A server complex coupled to the database communicates, to a requesting Internet Protocol (IP) user, at least one page including one or more scheduling input fields. The server complex receives scheduling input from the requesting IP user for a requested conference according to the scheduling input fields. The server complex accesses the database to determine, according to the scheduling input, whether sufficient conferencing resources are available for the requested conference. If so, the server complex allocates at least some of the available conferencing resources to the requested conference and generates confirmations of the requested conference for communication to the callers.

According to another embodiment of the present invention, software associated with an IP user includes conference scheduling software and control software. The scheduling software provides at least one page to the IP user that includes one or more scheduling input fields for a requested conference involving at least one public switched telephone network (PSTN) caller and at least one IP caller. The scheduling software receives scheduling input from the IP user for the requested conference, according to the scheduling input fields, for communication to a server complex associated with the conference bridge. The control software is used for controlling selected aspects of a conference in progress that involves at least one public switched telephone network (PSTN) caller and at least one IP caller. The control software, in response to the IP user being provided with current state information for the conference, receives control input from the IP user for communication to a conference bridge in which the conference is implemented.

In yet another embodiment, a system for conferencing callers includes a database that stores current state information for one or more conferences, at least one of the

conferences involving at least one PSTN caller and at least one IP caller. A conference bridge node coupled to the database generates conference traffic for communication to the callers, generates current state information for each conference for communication to IP users associated with the conferences and, in addition, periodically communicates current state information for each conference to the database for storage. The system also includes a server complex, coupled to the database and to the conference bridge node, that periodically accesses the stored current state information for at least one conference associated with an IP user and communicates at least some of that stored current state information to the IP user.

The present invention provides a number of important technical advantages over previous conferencing systems. Unlike those systems, the present invention provides simultaneous conferencing of both PSTN and IP callers without requiring a separate IP gateway device to convert IP signals received from the IP callers into a format suitable for the conference bridge. The present invention allows IP callers to terminate directly to the conferencing system, without converting associated IP packets to PSTN signals prior to conferencing. The present invention also provides computing resources that are dedicated to conferencing, reducing or eliminating the conferee limitations associated with previous conferencing systems. The present invention incorporates a physically segmented backplane bus, one segment within each node and separated from all other segments, such that the nodes may be housed in a single chassis while communicating incoming user signals and outgoing conference traffic with one another using the TDM bus. The system typically has a lower initial cost relative to previous large-scale digital conferencing systems, and is readily scalable as conferencing needs grow.

A server complex, an associated database, and software associated with one or more IP users may cooperate to allow the IP users to schedule conferences, change scheduled conferences, monitor conferences already in progress, exercise substantially real-time control over conferences they are moderating, monitoring, or participating in, and perform other appropriate activities. In response to a conference being scheduled, PSTN and IP callers are provided with confirmations containing information needed to join the conference, including a telephone number (PSTN caller) or an IP address (IP caller). As a result of these and other important technical advantages over previous

techniques, the present invention is well suited for modern distributed conferencing environments involving PSTN and IP traffic. Other technical advantages are readily apparent to those skilled in the art.

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280

BRIEF DESCRIPTION OF THE DRAWINGS

To provide a more complete understanding of the present invention and further features and advantages thereof, reference is now made to the following description taken in conjunction with the accompanying drawings, in which:

5 FIGURE 1 illustrates an exemplary Internet-enabled conferencing system that accommodates PSTN and IP calls;

 FIGURE 2 illustrates an exemplary IP user;

 FIGURE 3 illustrates an exemplary chassis;

 FIGURE 4 illustrates an exemplary method of scheduling a conference;

10 FIGURE 5 illustrates an exemplary web page for scheduling a conference;

 FIGURE 6 illustrates an exemplary conference confirmation;

 FIGURE 7 illustrates an exemplary method of joining a caller to a conference;

and

15 FIGURE 8 illustrates an exemplary method of participating in a conference as a moderator, monitor, or other IP user.

DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 illustrates an exemplary Internet-enabled system 10 that provides audio, video, data or other conferencing for traffic originating within the public switched telephone network (PSTN) 12, within one or more Internet Protocol (IP) networks 14, or within both types of networks. Although PSTN 12 is discussed, PSTN 12 is meant to include any suitable telephone network or networks, public or private. One or more PSTN callers 16a are coupled to PSTN 12 and communicate audio, video, data, or other suitable PSTN traffic using PSTN 12. Similarly, one or more IP callers 16b are coupled to IP network 14 and communicate audio, video, data, or other suitable IP traffic using IP network 14, which may include one or more suitable local area networks (LANs), metropolitan area networks (MANs), wide area networks (WANs), a global computer network such as the Internet, or any other suitable network or networks that support IP communications. Callers 16a and 16b may be referred to in the singular as caller 16 and in the plural as callers 16, as appropriate. As indicated by dashed box 18, PSTN caller 16a may also be an IP caller 16b, depending on the associated device and the type of traffic that caller 16 is communicating. Typically, dual callers 16 may use PSTN 12 in communicating voice and other "narrowband" audio information, while using the higher bandwidth of IP network 14 to communicate video, multi-media, data, and other "broadband" information. The present invention contemplates caller 16 using PSTN 12 and IP network 14 in any suitable manner to communicate traffic.

System 10 includes file server 20 and associated database 22, web server 24, IP traffic manager 26, and one or more network interface chassis 28 coupled using a LAN or other suitable network 30 supporting IP communications. In one embodiment, each chassis 28 is coupled to PSTN 12 using a corresponding communications link 32. As described more fully below with reference to FIGURE 3, each link 32 may include a separate trunk group dedicated to the corresponding chassis 28. LAN 30 is coupled to IP network 14 using link 34, which may be any communications link appropriate to communicate IP traffic between LAN 30 and IP callers 16b. Although a single complex of file server 20, associated database 22, web server 24, IP traffic manager 26, and multiple chassis 28 is shown, the present invention contemplates one or more such complexes (or components thereof) cooperating in any appropriate manner to provide

Internet-enabled conferencing functionality for PSTN and IP callers 16 in a distributed conferencing environment.

File server 20 accesses and manipulates information contained in database 22 according to the operation of system 10. For each caller 16, database 22 may contain, in any suitable combination and without limitation: (1) one or more names or other caller identifiers; (2) one or more user passwords; (3) one or more customer identifiers with which user 16 is associated, identifying entities that may be billed for conferences that are set up by or otherwise involve caller 16; (4) one or more billing or other physical addresses; (5) one or more e-mail, IP, medium access control (MAC), or other electronic addresses; (6) one or more telephone numbers; (7) one or more images of caller 16, for display to one or more other callers 16 joined in conferences with caller 16; and (8) any other appropriate personal information. In one embodiment, such information may be maintained in the form of an address book for caller 16, some or all of which may be displayed or otherwise conveyed during a conference to caller 16, other joined caller 16, a conference moderator, a conference monitor, or other suitable person, automatically or on request. Such an address book may be integrated or otherwise compatible with one or more suitable software application providing e-mail, organizer, and any other functions, for example, MICROSOFT OUTLOOK.

File server 20 cooperates with components of chassis 28 during conferences, as appropriate. For example, and not by way of limitation, file server 20 may help provide interactive voice response (IVR) capabilities to interact with callers 16 wishing to join conferences. File server 20 may also facilitate the populating and periodic updating of database 22 with state information for conferences. For each scheduled conference, database 22 may maintain the following state information, in any suitable combination and without limitation: (1) a conference identifier; (2) a customer identifier associated with the entity that is to be billed for the conference; (3) a scheduled start date and time; (4) a scheduled stop date and time; (5) a scheduled duration; (6) the number of callers 16 anticipated or that have actually joined the conference; (7) the name or other identifier of each anticipated or joined caller 16; (8) the telephone number of each anticipated or joined caller 16; (9) the e-mail, IP, MAC, or other electronic address of each anticipated or joined caller 16; (10) an indicator of whether each anticipated or joined caller 16 is a

PSTN caller 16a or an IP caller 16b; (11) a timeslot assigned to each joined caller 16, in which incoming traffic from that caller 16 is carried; (12) a conference timeslot assigned to each joined caller 16, in which outgoing conference traffic to the caller 16 is carried; (13) a conference password; and (14) any other appropriate state information associated with the setting up, progress, or tearing down of the conference.

In addition to being able to participate in conferences, one or more IP callers 16b may have access to conference control, web setup, and web monitoring software through an associated web browser or otherwise. Such IP callers 16b may be referred to as IP users 16b in connection with the use of such software. Although IP users 16b may participate in conferences as IP callers 16b, as described below IP user 16b need not participate in a conference as IP caller 16b to use such software. Web server 24 stores and pushes web pages, forms, e-mail notifications, and other suitable information to IP users 16b in connection with the setting up, progress, or tearing down of conferences. Web server 24 cooperates with conference control, web setup, and web monitoring software associated with IP user 16b to provide IP user 16b with an Internet-enabled interface to the conferencing resources associated with chassis 28. Web server 24 also supports resource allocation software used during operation of system 10 to determine, before allowing a requested conference to be set up, whether system 10 can support the conference and its various parameters. Resource allocation in system 10 is described more fully below with reference to FIGURE 3. Where appropriate, file server 20 individually, web server 24 individually, or the combination of file server 20 and web server 24 may be referred to as a server complex.

FIGURE 2 illustrates an exemplary IP user 16b that supports a voice over IP (VoIP) "screen phone" 30 or another ITU-T H.323 compatible end station suitable to communicate IP traffic using IP network 14. An example of such a screen phone is MICROSOFT NETMEETING. IP user 16b also supports conference control software 32 suitable for use in connection with the setting up, progress, and tearing down of conferences according to the operation of system 10. IP user 16b may further support web setup software 44 and web monitoring software 46, which may be integral to or separate from one another and conference control software 42. Web setup software 44 allows IP user 16b to set up conferences, using an associated web browser or otherwise,

in the manner described in FIGURE 4. If appropriate according to the authorization of user 16b as administrator, moderator, or otherwise, web monitoring software 44 allows user 16b to monitor some or all ongoing conferences, using an associated web browser or otherwise, in the manner described in FIGURE 8. In one embodiment, a system administrator might be entitled to monitor and receive information concerning some or all conferences and sub-conferences, while a moderator or monitor might be entitled to monitor and receive information concerning only a particular conference and any of its associated sub-conferences.

IP user 16b is associated with at least one computer 48 that includes an input device 50 such as a keypad, touch screen, microphone, or any other device to accept information. An output device 52 of computer 48 may convey information to user 16b associated with the setting up, progress, and tearing down of conferences. Input device 50 and output device 52 may support computer diskettes, CD-ROMs, or other fixed or removable storage media suitable to receive output from and provide input to user 16b and to components of system 10 through IP network 14. A processor 54 and associated volatile or non-volatile memory may execute instructions and manipulate information according to the operation of system 10. Where appropriate, reference to IP user 16b is meant to include computer 48, whether alone or in combination with a human user, unless otherwise indicated. Screen phone 40 operates on computer 48 and allows IP caller 16b to communicate IP traffic for conferences. Conference control software 42, web setup software 44, and web monitoring software 46 operate on computer 48 and collectively provide IP user 16b with an Internet-enabled interface to the resources and functionality of system 10, through an associated web browser or otherwise.

FIGURE 3 illustrates an exemplary chassis 28 that includes voice nodes 60, a VoIP node 42, and a conference bridge node 44. Each node 40, 42, and 44 includes a dedicated central processing unit (CPU) card 66, which may incorporate a single board computer or any other suitable processing entity. In addition, voice nodes 60 and VoIP node 42 each include one or more voice traffic cards 48 or VoIP traffic cards 70, as the case may be. Although four voice nodes 60 and a single VoIP node 42 are shown, the present invention contemplates chassis 28 including more or fewer voice nodes 60 and VoIP nodes 62 according to the traffic chassis 28 is intended to support and the relative

capacities of nodes 50 and 42. Similarly, although voice nodes 60 are each shown as including a single voice traffic card 48, and VoIP node 42 is shown as including two VoIP traffic cards 70, the present invention contemplates more or fewer traffic cards 48 and 50 according to particular needs. In addition to its CPU card 66, conference bridge node 44 includes a conference card 72 within which one or more conferences between callers 16 are implemented.

The voice cards 68, VoIP card 70, and conference card 72 are coupled to and communicate user traffic with each other using a time division multiplexed (TDM) bus 74. TDM bus 74 may be an ITU-T H.100 Peripheral Component Interconnect (PCI) or ITU-T H.110 compact PCI (cPCI) bus, a Signaling Computing bus (SCbus), a Multi-Vendor Integration Protocol (MVIP) bus, or any other TDM bus suitable to communicate user traffic between nodes 40, 42, and 44 during operation of system 10. As discussed above, link 32 for each chassis 28 may include a separate trunk group. Each such trunk group may be associated with one or more particular 800 or other telephone numbers, such that all calls from callers 16a to that telephone number are routed to a particular chassis 28. As shown in FIGURE 3, link 32 may include at least one T1, E1, or other appropriate digital telephone line 76 for each voice node 60. As further illustrated using the dashed oval 78, each voice node 60 may have multiple such lines 54, depending on the traffic voice node 60 is intended to support and the bandwidth associated with each line 76. In a particular embodiment, each of the voice cards 48 supports 48 ports and communicates with PSTN 12 using two T1 lines 76, each of the VoIP cards 70 supports 30 ports, and chassis 28 is able to support conferences involving 252 total callers 16, although as discussed above chassis 28 may be configured to support any appropriate number of callers 16.

The conferee limitations associated with previous conferencing systems are due, at least in part, to their use of software that depends on the primary CPU resources of the computer system on which it runs to manipulate the conference traffic. Even a relatively fast INTEL PENTIUM processor, for example, typically only supports seven or eight conferees in such an environment. In contrast to previous systems, system 10 provides conferencing functionality using a dedicated conference card 72 in conference node 44, having dedicated computer resources, with the desirable result that system 10 does not

suffer from the same capacity limitations plaguing such previous systems. As a result, system 10 provides an important technical advantage over such systems.

In general, CPU card 66 within each voice node 60 and VoIP node 62 provides appropriate logic used in connection with the setting up, progress, and tearing down of conferences that involve associated callers 16. This may include answering calls from callers 16, detecting the dual tone multi-frequency (DTMF) or other digits that callers 16 enter, providing appropriate IVR capabilities for interaction with callers 16, determining whether callers 16 who call in have provided a valid password to access the conference, determining whether callers 16 who call in and provide a caller identifier were previously identified during "detailed" conference setup (such that the names, images, and other personal information associated with these callers 16 may be conveyed to joined users 16), and any other suitable activities. CPU cards 66 within voice nodes 60, VoIP node 62, and conference bridge node 64 may cooperate with file server 20 to access and manipulate information contained in database 22 in providing such functionality.

Voice cards 48 in voice nodes 60 receive the digitized and coded voice signals of PSTN callers 16a from lines 76 and, according to instructions from CPU card 66 in conference bridge node 64, place these signals on TDM bus 74 for communication to conference card 72 in conference bridge node 64. In one embodiment, the signals for each PSTN caller 16a are placed in a corresponding pre-assigned incoming timeslot on TDM bus 74, this association between PSTN callers 16a and incoming timeslots being "nailed up" or otherwise specified upon scheduling of the conference. Similarly, VoIP cards 70 within VoIP node 62 receive IP packets for IP callers 16b from LAN 30 and, according to instructions from CPU card 66, convert the packetized voice signals of IP callers 16b as appropriate and place them in pre-assigned incoming timeslots on TDM bus 74 for communication to conference card 72.

In one embodiment, CPU cards 66 within chassis 28 are configured in a client-server architecture, with voice nodes 60 and VoIP node 62 operating as "clients" subject to the control of "server" CPU card 66 within conference bridge node 64. In response to a caller 16 calling in and connecting to a voice node 60 or VoIP node 62, CPU card 66 of conference bridge node 64 receives signaling information from CPU cards 66 of that voice node 60 or VoIP node 62 using LAN 30. In one embodiment, the signaling

information received from CPU card 66 of voice node 60 or VoIP node 42 includes, for each user 16 that calls in, at least the conference identifier such that CPU card 66 of conference bridge node 64 can then determine the appropriate conference for caller 16. Conference card 72 receives all incoming timeslots carried on TDM bus 74 from voice cards 68 and VoIP card 70.

For outgoing conference traffic, the CPU card 66 of conference bridge node 64 instructs voice nodes 60 and VoIP node 62 which timeslot on TDM bus 74 to read for each caller 16. In one embodiment, each joined caller 16 will receive conference traffic corresponding to all the other joined caller 16, but will not receive the caller's own voice or other signals. Thus, for example and not by way of limitation, if three callers 16 have been joined in a conference, the first caller 16 will receive the voice signals of only the second and third callers 16, the second caller 16 will receive the voice signals of only the first and third callers 16, and the third caller 16 will receive the voice signals of only the first and second callers 16. Where IP user 16b or other conference moderator has opted to mute a joined caller 16 using conference control software 42, voice or other signals for the muted caller 16 will not be communicated to IP user 16b or, instead or in addition, to other joined callers 16. Conference traffic received at voice cards 68 and VoIP card 70 from the conference card 72 is communicated to appropriate joined callers 16a and 16b using lines 76 and LAN 30, respectively.

The cards within a particular node 60, 62, or 64 communicate with one another using a signaling backplane bus 80, which is physically segmented from other buses 58 in chassis 28 such that signaling information carried over bus 80 is not communicated from node 60, 62, or 64 to another node 60, 62, or 64 within chassis 28. Due to typical hardware limitations, each bus 80 can have at most one driver, in this case associated CPU card 66. Providing multiple segmented buses 80 -- one for each node 60, 62, and 64 -- allows multiple nodes 60, 62, and 64 to communicate conference traffic using a single TDM bus 74 within a single chassis 28, providing another important technical advantage. For example, if buses 80 were not segmented, each of the nodes 60, 62, and 64 would require a separate chassis and a specialized card to communicate its TDM conference traffic from its chassis to chassis of other nodes 60, 62, and 64. According to the present invention, however, any voice card 68, VoIP card 70, or conference card

72 within chassis 28 may communicate information onto and receive information from any timeslot on TDM bus 74.

As described more fully below, this helps enable many more callers 16 to join a conference than would be possible with prior systems, which typically limit the total number of conferees to eight or fewer. As just an example, in the particular embodiment in which chassis 28 supports 252 total callers 16, three of the many possible allocations of conferencing resources might include one conference of up to 252 callers 16, two conferences of up to 126 callers 16 each, and three conferences of up to 84 callers 16 each. However, the conferencing capacity of chassis 28 may be allocated to one or more conferences in any suitable manner, according to particular needs. The present invention contemplates any combination of conferences and conferees within the limitations of conference bridge node 64 and TDM bus 74.

Furthermore, unlike prior conferencing systems supporting both PSTN and IP callers, system 10 does not require a separate IP gateway device to convert packetized IP traffic to PSTN traffic prior to conferencing. Instead, IP traffic may terminate directly at VoIP card 70 within chassis 28. According to the present invention, the IP traffic is received from IP caller 16b at VoIP card 70, formatted as appropriate, and placed onto the incoming timeslot corresponding to IP caller 16b on TDM bus 74 for conferencing. In a similar manner, VoIP card 70 reads the outgoing conference traffic for IP caller 16b from the conference timeslot corresponding to IP caller 16b on TDM bus 74, according to instructions from conference node 46, formats it as appropriate, and communicates IP traffic to IP caller 16b. For PSTN caller 16a, the incoming and outgoing operations are analogous, except that no packetizing or depacketizing is necessary. Accommodating both PSTN and IP traffic, seamlessly and simultaneously, while eliminating the cost, complexity, and reliability concerns associated with a separate IP gateway device is another important technical advantage of the present invention.

FIGURE 4 illustrates a method of scheduling a conference. The method begins at step 100, where IP user 16b uses associated web setup software 44, through a web browser or otherwise, to access web server 24 and its resources. Web server 24 pushes suitable web pages to IP user 16b according to input from IP user 16b and the operation of system 10. At step 102, if IP user 16b is a new user to system 10, IP user 16b may

register with system 10 as a new account, providing requested contact, billing, and any other suitable information. IP user 16b logs on using the corresponding account number and password at step 104 and, at step 106, selects an option from among a number of possible options. Options may include but are not limited to: (1) schedule a conference, (2) change one or more parameters associated with a scheduled conference, and (3) edit an address book for IP user 16b. If IP user 16b opts to schedule a conference at step 108, the IP user 16b may select a "detailed" setup, in which case the IP user 16b selects from an address book or otherwise specifies all callers 16 anticipated to join the conference (in addition to other parameters for the conference), or an "express" setup, in which case IP user 16b specifies only minimal parameters for the conference.

If IP user 16b selects "detailed" setup at step 110, IP user 16b provides suitable conference parameters at step 112. As illustrated in FIGURE 5, which represents an exemplary hyper-text markup language (HTML) or other page 200 pushed to IP user 16b from web server 24 during conference setup, parameters may include, in any suitable combination and without limitation: (1) the start date and time 202, (2) the duration 204 (or the stop date and time), (3) the maximum number 206 of callers 16, (4) the names or other identifiers 208 for all anticipated callers 16, (5) the conference password 210, and (6) the selected confirmation method 212. Referring again to FIGURE 4, if at step 112 IP user 16b instead selects the "express" setup, IP user 16b provides less comprehensive conference parameters at step 114, which in one embodiment may simply include: (1) start date and time 202, (2) duration 204, and (3) maximum number 206 of callers 16. The present invention contemplates IP user 16b providing any appropriate conference parameters, whether in "detailed," "express," or any other mode to schedule a conference using the Internet-enabled front end associated with system 10.

At step 110, in response to receiving the conference parameters from IP user 16b at step 112 or 114, web server 24 queries file server 20 and its associated database 22 to determine whether sufficient resources are available to support the conference as it has been requested. For example, in a particular embodiment in which system 10 includes a single chassis 28 supporting 252 concurrent callers 16, assume two conferences each involving 100 callers 16 were previously scheduled to begin on March 1, the first from 9:00-11:00 a.m. and the second from 10:00-11:00 a.m. If IP user 16b has requested a

conference for 50 callers 16 from 9:00-11:00 a.m. on March 1, then sufficient resources are available (since there will be at most 250 simultaneous callers 16 during any portion of the requested conference) and file server 20 reports this to web server 24 at step 118. However, if IP user 16b requested a conference for 60 callers 16 from 9:00-11:00 on March 1, or requested a conference for 160 callers from 9:00-10:00 on March 1, then sufficient resources are not available (since there would be up to 260 concurrent callers 16 for at least part of the requested conference) and file server 20 reports this information to web server 24 at step 118.

At step 120, if there are sufficient resources for the conference as it has been requested, web server 24 may prompt IP user 16b for confirmation at step 122 before web server 24, file server 20, and database 22 cooperate to allocate suitable resources to that conference at step 124. In one embodiment, this involves populating database 22 with some or all of the parameters for the conference, including an identifier assigned to the conference. Web server 24 informs IP user 16b of successful conference setup at step 126, sends e-mail, facsimile, page, telephone, or other suitable conference confirmations to all or selected anticipated callers 16 at step 128, and the method ends.

An exemplary conference confirmation 220 is illustrated in FIGURE 6. In one embodiment, confirmation 220 provides to anticipated caller 16 the following, in any suitable combination and without limitation: (1) schedule or other general conference information 222; (2) the 800 or other telephone number 224 associated with the assigned chassis 28 for the conference (for PSTN callers 16a who will join using PSTN 12); (3) an IP address 226 associated with IP traffic manager 26 or with VoIP node 62 in assigned chassis 28 (for IP callers 16b who will join using IP network 14); (4) conference entry information 228 that caller 16 may provide before joining the conference, including the conference identifier, conference password, the caller identifier for the caller, or other suitable information; and (5) instructions 230 for joining the conference using either PSTN 12 or IP network 14, as appropriate. Confirmation 220 may provide any other suitable information to caller 16 according to particular needs.

Although an exemplary confirmation 220 is illustrated, confirmation 220 may have any appropriate format and content. Callers 16 receiving confirmations 220 may have an opportunity to send an e-mail or other reply to accept, tentatively accept, or reject

participation in the conference. Confirmations 220 sent to anticipated PSTN callers 16a may be the same or different from confirmations 220 sent to anticipated IP callers 16b. For example, confirmations 220 sent to PSTN callers 16a may include only telephone number 224 and instructions 230 needed to join using PSTN 12, while confirmations 220 sent to IP callers 16b might include only IP address 226 and instructions 230 needed to join using IP network 14. In the alternative, for convenience or any other appropriate reason, confirmations 220 sent to all callers 16 may include the same information. For example, all confirmations 220 may include telephone number 224, IP address 226, and instructions 230 needed to join the conference using PSTN 12 and IP network 14, respectively.

Referring again to FIGURE 4, if sufficient resources are not available for the conference as requested at step 120, then web server 24, file server 20, and database 22 cooperate to identify one or more alternatives that might be suitable to IP user 16b at step 130. For example, in the particular example discussed above, system 10 may determine that although the conference cannot be setup exactly as requested, sufficient resources exist on March 1 for a conference for 160 callers from 11:00 a.m to 1:00 p.m. (instead of from 9:00-11:00 a.m. One or more of the alternatives identified, according to any appropriate algorithm, are presented to IP user 16b at step 132, IP user 16b selects an identified alternative at step 134, and the method returns to step 124 for allocation of suitable resources. In one embodiment, the requested conference may be treated as a "block" of time of the requested duration 204 having the requested maximum number 206 of callers 16. To identify an alternative, web server 24, file server 20, and database 22 may cooperate to "slide" this time block forward, backward, or both forward and backward in time until it is consistent with the available resources.

Alternatively, the requested conference may be viewed as a "block" of callers 16 for which the requested start date and time 202, duration 204, or other parameters may be modified in identifying alternatives. These and other suitable schemes may be used until a predetermined number of alternatives are identified, the number of alternatives within a specified range of the requested conference (in terms of start time, duration, number of callers 16, or any other suitable parameters) have been exhausted, or any other conditions are satisfied, according to particular needs. As discussed more fully above

with reference to FIGURE 3, system 10 allocates resources to conferences dynamically in an on-line transaction processing (OLTP) environment, in substantially real time, so that requesting IP user 16b may be informed substantially immediately that the requested conference can be scheduled as requested or, if not, of one or more alternatives from which to choose. This provides an important technical advantage over systems relying on batch processing to allocate resources to conferences.

If IP user 16b does not wish to schedule a new conference at step 108, but instead selects the option to change one or more parameters for a scheduled conference at step 136, IP user 16b identifies the conference at step 138 and submits at least the parameters to be changed at step 140. The method then returns to step 116 for determination of the available resources. For example only, and not by way of limitation, IP user 16b may wish to add or delete one or more anticipated callers 16, scheduled start date and time 202, or duration 204. At least any anticipated callers 16 who are added or deleted may receive confirmation 220 or other suitable confirmation of this occurrence. Other callers 16 may also be notified of such changes. If start date and time 202 or duration 204 is changed, all anticipated callers 16 should preferably receive new confirmations 220 indicating such changes at step 128. If no changes are to be made to the conference parameters at step 136, IP user 16b has selected another option and interacts with web server 24 and other components of system 10 accordingly at step 142, and the method ends. For example, IP user 16b may have selected an option enabling IP user 16b to change an associated address book, review account information, or perform any other suitable operation, according to particular needs.

Once a conference has been scheduled and the conference start time has arrived, callers 16 may join or be joined to the conference. FIGURE 7 illustrates an exemplary method of joining caller 16 to a scheduled conference, using either a "dial-in" procedure, a "dial-out" procedure, or a combination of these. The present invention contemplates using either or both of procedures to join callers 16 to a particular conference, according to particular needs. Although the joining of a typical caller 16 is discussed, the present invention contemplates a joining a conference moderator or monitor in an analogous manner. If caller 16 is calling in to join the conference at step 300 ("dial-in"), caller 16 enters at step 302 the conference telephone number 224 (PSTN caller 16a) or IP address

226 (IP caller 16b) previously provided to the caller 16 in confirmation 220. At step 304, caller 16 connects to corresponding voice node 60 (PSTN caller 16a) or VoIP node 62 (IP caller 16b) within assigned chassis 28. As described above, if IP address 226 within confirmation 220 is for IP traffic manager 26, rather than for one of the VoIP cards 70 within chassis 28, IP caller 16b may first connect to IP traffic manager 26, which is responsible for routing IP user 16b to the destination VoIP card 70.

Voice node 60 or VoIP node 62 may interact with caller 16 using associated IVR capabilities or otherwise, to request input from caller 16 at step 306. At step 308, caller 16 enters conference entry information 228 previously provided in confirmation 220. At step 310, caller 16 may further provide an associated caller identifier to allow the name, stored image, and any other personal information for caller 16 to be conveyed to one or more other callers 16 that have already joined or will later join the conference. At step 312, CPU card 66 of voice node 60 or VoIP node 62 communicates a request to CPU card 66 of conference bridge node 64 to connect caller 16 to conference card 72 to join the conference. CPU card 66 of conference bridge node 64 responds to the request at step 314 and, at step 316, caller 16 is connected to conference card 72. Caller 16 may need to provide a personal entrance code used for auditing participation in the conference, roll call, or any other suitable purpose.

At step 318, caller 16 is joined to the conference, such that: (1) voice signals or other information originating at caller 16 may be received at voice card 68 of VoIP card 70, formatted if necessary, and placed onto TDM bus 74 in the corresponding timeslot for communication to conference card 72; and (2) conference traffic from all or selected other callers 16 may be placed on TDM bus 74 in the assigned conference time slot for communication to voice card 68 or VoIP card 70, properly formatted if necessary, and communicated to caller 16 using PSTN 12 or IP network 14. Substantially simultaneous with caller 16 being joined, conference node 52, file server 20, and database 22 cooperate at step 320 to update database 22 with information indicating caller 16 (whether or not identified according to a caller identifier) is joined, and the method ends.

If a moderator or another authorized IP user 16b is calling out to join caller 16 to the conference at step 300 ("dial-out"), rather than caller 16 calling in to join, IP user 16b uses conference control software 42 to enter suitable control information at step 322,

which may include at least conference entry information 228. At step 324, IP user 16b enters the telephone number 224 (PSTN caller 16a) or IP address 226 (IP caller 16b) for the caller 16 to be joined. At step 326, conference bridge node 64 instructs appropriate voice node 60 or VoIP node 62 to place an outgoing PSTN or IP call to caller 16. Caller 16 answer the call at step 328, is connected to voice node 60 or VoIP node 62 within assigned chassis 28 at step 330, and the method proceeds to step 316, where caller 16 is connected to conference card 72 to be joined to the conference. It may be desirable to require callers 16 to provide a caller identifier or other authentication information prior to receiving conference traffic, as a security precaution.

Callers 16 joined in a dial-out conference may participate immediately on being joined or placed on hold until all anticipated callers 16 are joined. In response to caller 16 joining, an entry tone or other indicator may be provided to other joined callers 16. The name, image, and other personal information for new caller 16 may be provided to other joined callers 16 who are also IP users 16b (and thus have access to conference control software 42 or web monitoring software 46, through an associated web browser or otherwise) to make the conference more effective and more similar to face-to-face personal interaction. The present invention contemplates joining any number of callers 16 to the conference serially, substantially simultaneously, or in any other appropriate manner and at any time during the conference, subject to available resources.

In one embodiment, caller 16 may be played one or more pre-recorded messages before caller 16 begins to receive conference traffic. For example, one or more pre-recorded message may prompt caller 16 to provide a password or other authentication information, the authenticity of caller 16 may be verified, and then caller 16 may begin receiving conference traffic. A message may be informational, for example, informing caller 16 that caller 16 is about to join a specified conference relating to specified subject matter or involving specified individuals. A message may be intended only for one or more selected callers 16, the message being played to those callers 16 in response to the callers 16 joining the conference or in response to the callers 16 additionally providing their caller identifiers. The present invention contemplates any appropriate message played to caller 16 before, during, or after caller 16 is joined to the conference or a sub-conference.

FIGURE 8 illustrates an exemplary method of participating in a conference as a moderator, monitor, or other IP user 16b using conference control software 42 or web monitoring software 46, through an associated web browser or otherwise. One or more moderators, monitors, or other IP users 16b may be referred to collectively as IP users 16b. Each IP user 16b may have a privilege level determining the operations available to that IP user 16b through conference control software 42 and web monitoring software 46 as a moderator, monitor, or other IP user 16b. The method begins at step 400, where some or all anticipated callers 16 are joined and the conference is progressing. At step 402, assuming these joined callers 16 provided a name or other caller identifier upon joining the conference, the name, stored image, or any other personal information for each joined caller 16 may be conveyed to IP users 16b. This allows at least the IP users 16b who are also IP callers 16b to participate in a more natural and more productive conference environment than would be possible using only audio information. It further allows IP users 16b to readily determine who is currently participating in the conference as callers 16. Although conveying names, images, and other information to callers 16 who are not also IP users 16b may be impractical or otherwise less desirable, the present invention contemplates providing suitable information, beyond conference traffic, to callers 16 who are not also IP users 16b.

In one embodiment, during the time a joined caller 16 is speaking, a colored or other speaking indicator may appear for IP users 16b at step 404 in association with the name, image, and other information for the speaking caller 16. The speaking indicator may be provided in response to detecting at conference card 72 that the signal energy for caller 16 exceeds a predetermined threshold or in any other appropriate manner. At step 406, IP user 16b may mute or subsequently unmute one or more callers 16 individually or in mass using conference control software 42. In one embodiment, to mute caller 16, conference control software 42 informs CPU card 66 of conference bridge node 64 and the CPU card 66 instructs conference card 72 to remove the information for caller 16 from appropriate conference timeslots on TDM bus 74. To unmute caller 16, conference card 72 is similarly instructed to insert the information for caller 16 into appropriate conference timeslots.

At step 408, a caller 16 may alert or otherwise signal the moderator or other IP user 16b using the associated telephone keypad, screen phone keyboard, or in another suitable manner. A tone may sound, which may be the same for some or all callers 16 or unique for each caller 16, or a colored or other indicator may appear in association with the name, image, or other information for the particular caller 16 who is signaling. For example, it may be desirable to preclude callers 16 from speaking until recognized. In such situations, an alert or other signal from a joined caller 16 to the moderator is akin to caller 16 raising a hand in a face-to-face meeting. Such a signaling feature may be used in conjunction with the muting feature described above to ensure that only one caller 16 may be heard at any time during the conference. Caller 16 may alert or otherwise signal the moderator to vote in response to a polling inquiry or in any other suitable manner, according to particular needs.

At step 410, the moderator may use conference control software 42 to cause a recorded announcement or message to be played to one or more callers 16. As described above with reference to FIGURE 7, such a message may be played to a caller 16 at any time before, during, or after caller 16 is joined to the conference. For example only, and not by way of limitation, a message might be intended for one or more selected callers 16, those callers being required to provide their caller identifiers before receiving the message. Before or during the conference, at step 412, the moderator may use conference control software 42 to cause the conference to be recorded in whole or in part. A colored or other indicator may be conveyed to IP users 16b to inform them that the conference is being recorded. At step 414, the moderator may select and move callers 16 into one or more new or already progressing sub-conferences. Such "break-out" conferences may be initiated in response to one or more IP users 16b alerting or otherwise signaling the moderator. One or more callers 16 being moved to a sub-conference may be played a pre-recorded message before receiving conference traffic in the sub-conference. As discussed above, where a message is intended for selected callers 16, it may be desirable to require the selected callers 16 to provide their caller identifiers before receiving the message. Sub-conferences may be for the primary purpose of playing a message to the callers 16 moved to the sub-conference, while preventing callers 16 remaining in the main conference from hearing the message.

A new caller 16 may join the conference at step 416, according to a dial-in, dial-out, or other suitable procedure, and an entry tone or other indicator provided to other joined callers 16 at step 418. In one embodiment, at any time during the conference, the moderator may use conference control software 42 to "lock-out" or otherwise block the entry of new callers 16. The present invention contemplates joining new callers 16 at any time during the conference, subject to the availability of resources. In one embodiment, if the name, stored image, or other personal information for the newly joined caller 16 is not conveyed automatically to the moderator or other IP users 16b, the moderator or other IP users 16b may access an associated address book to select information to be conveyed at step 420.

For example, the address book may include the stored images of a number of potential callers 16 with which an already IP user 16b has had or might in the future have a conference. According to particular needs, a company might choose to include stored images of all of its employees in the address books of all its employees. Upon learning that one of the potential callers 16 has joined the conference, IP user 16b may access an associated address book to select the image of the newly joined caller 16 at step 420 such that it may be conveyed visually to the selecting IP user 16b. Where the conference is a videoconference, providing a stored image of each joined caller 16 may be redundant and thus less desirable, whereas providing the name of each joined caller 16 may still be a desirable feature even in that situation. IP users 16b may also label a newly joined caller 16 with suitable text to indicate a title, an employment position, a role with respect to the topic of the conference, or any other appropriate information.

As the conference proceeds, at step 422, CPU card 66 of the conference bridge node 64 maintains substantially real time state information for the conference and may communicate it to some (multi-cast) or all (broadcast) IP users 16b, making possible features such as those described above. At step 424, CPU card 66 of conference bridge node 64 cooperates with file server 20 to dynamically populate database 22 with the current state information for the conference. This may occur periodically according to any appropriate schedule or in response to appropriate events. The state information maintained in database 22 may be provided, in whole or in part, to IP users 16b using web monitoring software 46, through an associated web browser or otherwise. Based on

the state information maintained at conference bridge node 64 and communicated to IP users 16b, the IP users 16b are able at step 424 to exercise substantially real time control over aspects of the conference, such as those described above, using conference control software 42 and possibly an associated web browser.

5 A joined caller 16 may leave the conference at any time at step 428, willingly or in response to the moderator disconnecting caller 16, and an exit tone or other indicator provided to other joined callers 16 at step 430. In one embodiment, to disconnect caller 16, CPU card 66 of conference bridge node 64 instructs CPU card 66 of voice node 60 or VoIP node 62 associated with caller 16, which in turn disconnects caller 16 from the
10 associated voice card 68 or VoIP card 70. If all joined callers 16 have left the conference at step 432, the method ends. Otherwise, the conference continues in progress and the method returns to step 402 as described above. The present invention contemplates at least steps 404 through 414 (exemplary features), 416 (add caller 16 to the conference), and 428 (caller 16 leaves the conference) occurring in any relative order according to the
15 progress of the particular conference.

Although the present invention has been described with several embodiments, a plethora of changes, substitutions, variations, alterations, and modifications may be suggested to one skilled in the art, and it is intended that the invention encompass all such changes, substitutions, variations, alterations, and modifications as fall within the
20 spirit and scope of the appended claims.

WHAT IS CLAIMED IS:

1. A system for scheduling a conference between callers, comprising:
a database operable to store scheduling information indicating at least a start time,
a duration, and a maximum number of callers for one or more scheduled conferences, the
5 scheduling information reflecting available conferencing resources;
a server complex coupled to the database and operable to:
communicate, to a requesting Internet Protocol (IP) user, at least one page
comprising one or more scheduling input fields;
receive scheduling input from the requesting IP user for a requested
10 conference according to the scheduling input fields;
access the database to determine, according to the scheduling input,
whether sufficient conferencing resources are available for the requested conference;
if sufficient conferencing resources are available, allocate at least some
available conferencing resources to the requested conference; and
15 in response to determining sufficient resources are available, generate
confirmations of the requested conference for communication to the callers.
2. The system of Claim 1, wherein the scheduling input indicates at least a
start time, a duration, and a maximum number of callers for the requested conference.
- 20 3. The system of Claim 2, wherein the scheduling input further comprises
a caller identifier for one or more callers.
4. The system of Claim 1, wherein the scheduling information specifies a
25 type of confirmation each caller is to receive.
5. The system of Claim 1, wherein:
the confirmation for a public switched telephone network (PSTN) caller provides
a conference telephone number; and
30 the confirmation for an Internet Protocol (IP) caller provides an IP address.

6. The system of Claim 1, wherein the confirmation provides a conference telephone number and a conference Internet Protocol address.

7. The system of Claim 1, wherein the confirmation provides conference entry information selected from the group consisting of:
5 a conference identifier; and
a conference password.

8. The system of Claim 7, wherein the confirmation further provides a caller identifier for the particular caller receiving the confirmation.
10

9. The system of Claim 1, wherein the confirmation provides instructions for joining the conference to each caller, each caller being selected from the group consisting of:
15 a public switched telephone network (PSTN) caller; and
an Internet Protocol (IP) caller.

10. The system of Claim 1, wherein the server complex is further operable, if sufficient conferencing resources are not available, to:
20 generate alternative scheduling information for the requested conference; and
communicate the alternative scheduling information to the requesting IP user for acceptance.

11. The system of Claim 1, wherein the server complex comprises at least a
25 web server.

12. A method of scheduling a conference between callers, comprising:

storing in a database scheduling information indicating at least a start time, a duration, and a maximum number of callers for one or more scheduled conferences, the scheduling information reflecting available conferencing resources;

5 communicating at least one page from a server complex to a requesting Internet Protocol (IP) user, the page comprising one or more scheduling input fields;

receiving scheduling input from the requesting IP user for a requested conference according to the scheduling input fields;

10 accessing the database using the server complex to determine, according to the scheduling input, whether sufficient conferencing resources are available for the requested conference;

if sufficient conferencing resources are available, using the server complex to allocate at least some available conferencing resources to the requested conference; and

15 in response, generating a confirmation at the server complex for communication to the callers.

13. The method of Claim 12, wherein the scheduling input indicates at least a start time, a duration, and a maximum number of callers for the requested conference.

20 14. The method of Claim 13, wherein the scheduling input further comprises a caller identifier for one or more callers.

15 15. The method of Claim 12, wherein the scheduling information specifies a type of confirmation each caller is to receive.

16. The method of Claim 12, wherein:

the confirmation for a public switched telephone network (PSTN) caller provides a conference telephone number; and

30 the confirmation for an Internet Protocol (IP) caller provides an IP address.

17. The method of Claim 12, wherein the confirmation provides a conference telephone number and a conference Internet Protocol address.

18. The method of Claim 12, wherein the confirmation provides conference entry information selected from the group consisting of:
5 a conference identifier; and
a conference password.

19. The method of Claim 18, wherein the confirmation further provides a caller identifier for the particular caller receiving the confirmation.
10

20. The method of Claim 12, wherein the confirmation provides instructions for joining the conference to each caller, each caller selected from the group consisting of:
15 a public switched telephone network (PSTN) caller; and
an Internet Protocol (IP) caller.

21. The method of Claim 12, further comprising, if sufficient conferencing resources are not available, using the server complex to:
20 generate alternative scheduling information for the requested conference; and
communicate the alternative scheduling information to the requesting IP user for acceptance.

22. The method of Claim 12, wherein the server complex comprises at least
25 a web server.

23. Software associated with an Internet Protocol (IP) user, comprising:
conference scheduling software operable to:

provide at least one page to the IP user comprising one or more scheduling
input fields for a requested conference involving at least one public switched telephone
5 network (PSTN) caller and at least one IP caller;

receive scheduling input from the IP user for the requested conference,
according to the scheduling input fields, for communication to a server complex
associated with the conference bridge; and

control software for controlling selected aspects of a conference in progress, the
10 conference involving at least one public switched telephone network (PSTN) caller and
at least one IP caller, the control software operable to:

in response to the IP user being provided with current state information
for the conference, receive control input from the IP user for communication to a
conference bridge in which the conference is implemented.

15

24. The software of Claim 23, wherein the scheduling indicates at least a start
time, duration, and maximum number of callers for the requested conference.

25. The software of Claim 24, wherein the scheduling input further comprises
20 a caller identifier for one or more callers.

26. The software of Claim 24, wherein the scheduling information specifies
a type of confirmation each caller is to receive.

27. The software of Claim 23, wherein the conference control input specifies
25 an outcome selected from the group consisting of:

muting of one or more callers;

unmuting of one or more callers;

signaling of one or more callers;

30 communicating a recorded message to one or more callers;

involving one or more callers in a sub-conference;

adding one or more new callers; and
removing one or more callers.

28. The software of Claim 27, wherein the outcomes available to the IP user
5 are determined according to a privilege level associated with the IP user.

29. The software of Claim 23, further comprising monitoring software
operable to:
10 provide at least one page to the IP user comprising one or more monitoring input
fields;
receive conference monitoring input from the IP user according to the monitoring
input fields, the monitoring input comprising a conference identifier for a conference to
be monitored; and
15 communicate the conference monitoring input to the conference bridge.

30. A method implemented in computer software associated with an Internet Protocol (IP) user, comprising:

providing at least one page to the IP user using conference scheduling software, the page comprising scheduling one or more scheduling input fields for a requested conference involving at least one public switched telephone network (PSTN) caller and at least one IP caller;

receiving scheduling input from the IP user for the requested conference, according to the scheduling input fields, for communication to a server complex associated with a conference bridge; and

in response to the IP user being provided with current state information for a conference in progress involving at least one public switched telephone network (PSTN) caller and at least one IP caller, receiving conference control input from the IP user using control software for communication to the conference bridge, the conference control input for controlling selected aspects of the conference.

31. The method of Claim 30, wherein the scheduling indicates at least a start time, duration, and maximum number of callers for the requested conference.

32. The method of Claim 31, wherein the scheduling input further comprises a caller identifier for one or more callers.

33. The method of Claim 31, wherein the scheduling information specifies a type of confirmation each caller is to receive.

34. The method of Claim 30, wherein the conference control input specifies an outcome selected from the group consisting of:

muting of one or more callers;

unmuting of one or more callers;

signaling of one or more callers;

communicating a recorded message to one or more callers;

involving one or more callers in a sub-conference;

adding one or more new callers; and
removing one or more callers.

35. The method of Claim 34, wherein the outcomes available to the IP user
5 are determined according to a privilege level associated with the IP user.

36. The method of Claim 30, further comprising:
providing at least one page to the IP user using monitoring software, the page
comprising monitoring input fields; and
10 receiving monitoring input from the IP user, using the monitoring software and
according to the monitoring input fields, for communication to the conference bridge, the
monitoring input comprising a conference identifier for a conference to be monitored.

37. A system for conferencing callers, comprising:

a database operable to store current state information for one or more conferences, at least one of the conferences involving at least one public switched telephone network (PSTN) caller and at least one Internet Protocol (IP) caller;

5 a conference bridge node coupled to the database and operable to:

generate conference traffic for communication to the callers;

generate current state information for each conference for communication to IP users associated with the conferences; and

10 in addition, periodically communicate current state information for each conference to the database for storage; and

a server complex coupled to the database and to the conference bridge node, the server complex operable to:

periodically access the stored current state information for at least one conference associated with an IP user; and

15 communicate at least some of that stored current state information to the IP user.

38. The system of Claim 37, wherein the current state information comprises a caller identifier for each caller currently involved in the conference.

20

39. The system of Claim 37, wherein the current state information comprises an indication of which one or more callers are currently speaking.

40. The system of Claim 37, wherein the conference bridge node is operable to generate the current state information for communication to IP users in substantially real time.

25

41. The system of Claim 37, wherein the server complex is further operable to:

30 receive conference control input from an IP user according to the current state information; and

communicate one or more instructions to the conference bridge node according to the conference control input.

42. The system of Claim 41, wherein the conference control input specifies
5 an outcome selected from the group consisting of:
muting of one or more callers;
unmuting of one or more callers;
signaling of one or more callers;
communicating a recorded message to one or more callers;
10 involving one or more callers in a sub-conference;
adding one or more new callers; and
removing one or more callers.

43. The method of Claim 42, wherein the outcomes available to the IP user
15 are determined according to a privilege level associated with the IP user.

44. The system of Claim 37, wherein the conference bridge node is further
operable to add a new caller to the conference in response to the new caller either
entering a conference telephone number or entering a conference IP address.
20

45. The system of Claim 44, wherein the conference bridge node is further
operable to generate an entry tone for communication to the callers in response to adding
the new caller to the conference.

46. The system of Claim 37, wherein the server complex comprises at least
25 a web server.

47. A method for conferencing callers, comprising:

storing in a database current state information for one or more conferences, at least one of the conferences involving at least one public switched telephone network (PSTN) caller and at least one Internet Protocol (IP) caller;

5 generating conference traffic using a conference bridge node for communication to the callers;

generating current state information for each conference using the conference bridge node for communication to IP users associated with the conferences;

10 periodically communicating current state information for the conferences from the conference bridge node to the database for storage;

using a server complex, periodically accessing the stored current state information for at least one conference associated with an IP user; and

communicating at least some of that stored current state information from the server complex to the IP user.

15

48. The method of Claim 47, wherein the current state information comprises a caller identifier for each caller currently involved in the conference.

49. The method of Claim 47, wherein the current state information comprises an indication of which one or more callers are currently speaking.

50. The method of Claim 47, wherein the conference bridge node generates the current state information for communication to IP users in substantially real time.

25 51. The method of Claim 47, further comprising:

receiving conference control input from at least one IP user at the server complex according to the current state information; and

communicating one or more instructions to the conference bridge node from the server complex according to the conference control input.

30

52. The method of Claim 51, wherein the conference control input specifies an outcome selected from the group consisting of:

muting of one or more callers;
unmuting of one or more callers;
5 signaling of one or more callers;
communicating a recorded message to one or more callers;
involving one or more callers in a sub-conference;
adding one or more new callers; and
removing one or more callers.

53. The method of Claim 52, wherein the outcomes available to the IP user are determined according to a privilege level associated with the IP user.

54. The method of Claim 47, further comprising using the conference bridge node to add a new caller to the conference in response to the new caller either entering a conference telephone number or entering a conference IP address.

55. The method of Claim 54, further comprising using the conference bridge node to generate an entry tone for communication to the callers in response to adding the new caller to the conference.

56. The method of Claim 47, wherein the server complex comprises at least a web server.

INTERNET-ENABLED CONFERENCING SYSTEM AND METHOD
ACCOMMODATING PSTN AND IP TRAFFIC

ABSTRACT OF THE DISCLOSURE

A system for scheduling a conference between callers includes a database that stores scheduling information indicating at least a start time, a duration, and a maximum number of callers for one or more scheduled conferences, the scheduling information reflecting available conferencing resources. A server complex coupled to the database communicates, to a requesting Internet Protocol (IP) user, at least one page including one or more scheduling input fields. The server complex receives scheduling input from the requesting IP user for a requested conference according to the scheduling input fields. The server complex accesses the database to determine, according to the scheduling input, whether sufficient resources are available for the requested conference. If so, the server complex allocates at least some available resources to the requested conference and generates confirmations of the requested conference for communication to the callers.

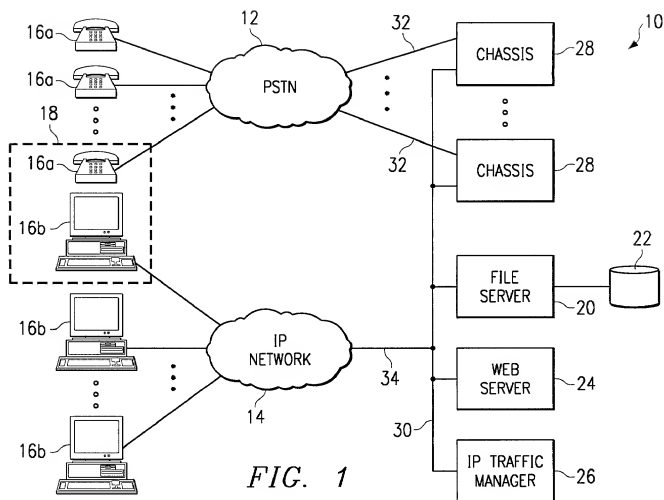


FIG. 1

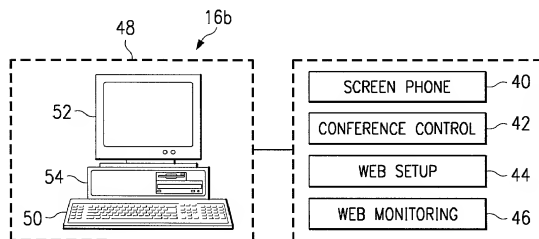
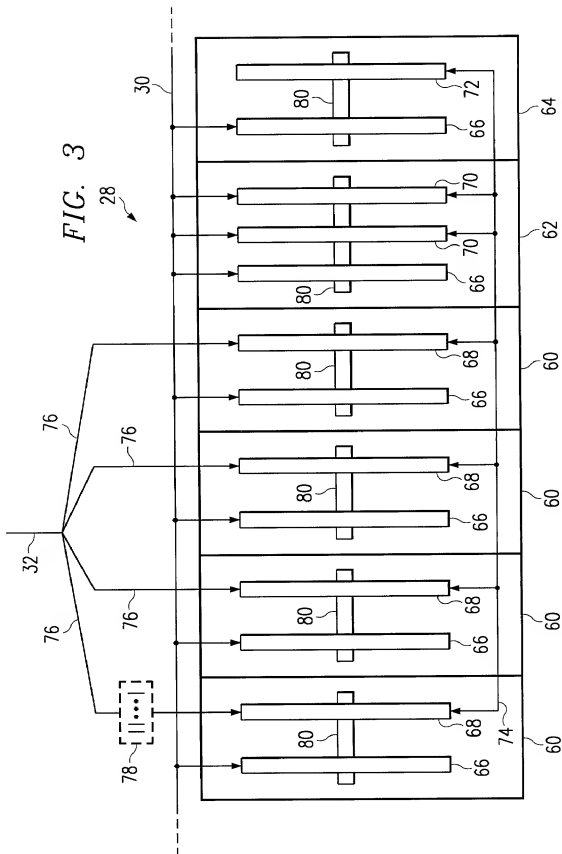


FIG. 2

FIG. 3



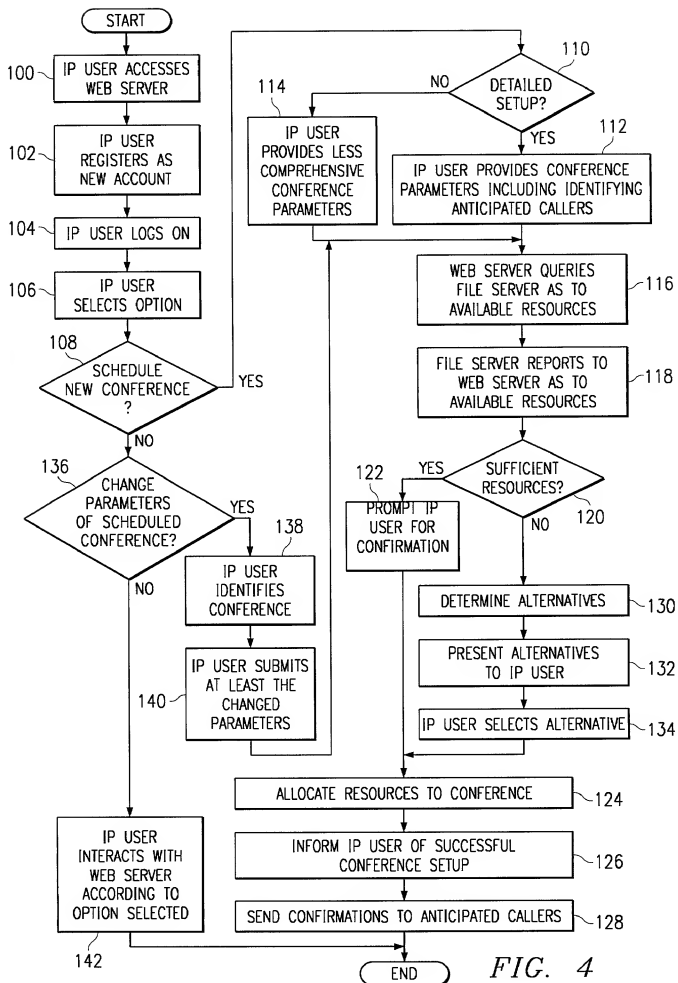


FIG. 4

200

Conference Setup

Account Number: 154
Account Name: eMeeting.net

Setup Type

Start Date

Start Time : CDT } 202

Duration Hrs Mins ← 204

Maximum Users 206

User 1

User 2

⋮

User 50 } 208

Conference Password 210

Confirmation Method 212

FIG. 5

220

Conference Confirmation

The following information has been emailed to **greg@bigco.com**. If you would like to E-Mail or Print this information, [click here](#).



Conference Information for
Greg Jones

Scheduled by **Larry Smith**
Account number **154**

Scheduled **02-07-2000 01:09PM**

This is to notify you of a scheduled Meet Me conference from
eMeeting.net

222 Schedule:

Your Meet Me conference is scheduled for **50** users on **03/01/2000** and will last from **09:00AM** until **09:59AM** for a duration of **60** minutes.

224 Conference phone number:
(800) 555-6789

Your conference ID is: **710**
Your conference password is: **9999**

226 Conference IP address:
209.144.22.74

228

Participating through your telephone:

1. Dial **(800) 555-6789**.
2. When prompted for conference ID, enter **710#**.
3. When prompted for Password, enter **9999#**.

Participating through the Internet:

- 230
1. Run Microsoft NetMeeting.
 2. Go to the Tools menu, select Options.
 3. Select the My Information tab.
 4. In the First Name field, enter **710**.
 5. In the Last Name field, enter **9999**.
 6. Click OK.
 7. Click the large Call button.
 8. In the Address field, enter **209.144.22.74**.
 9. Click Call.

If you need any help, call (214) 555-5353. Thank you for using
eMeeting.net Meet Me Conferencing.



Setup another conference



Return to main account screen


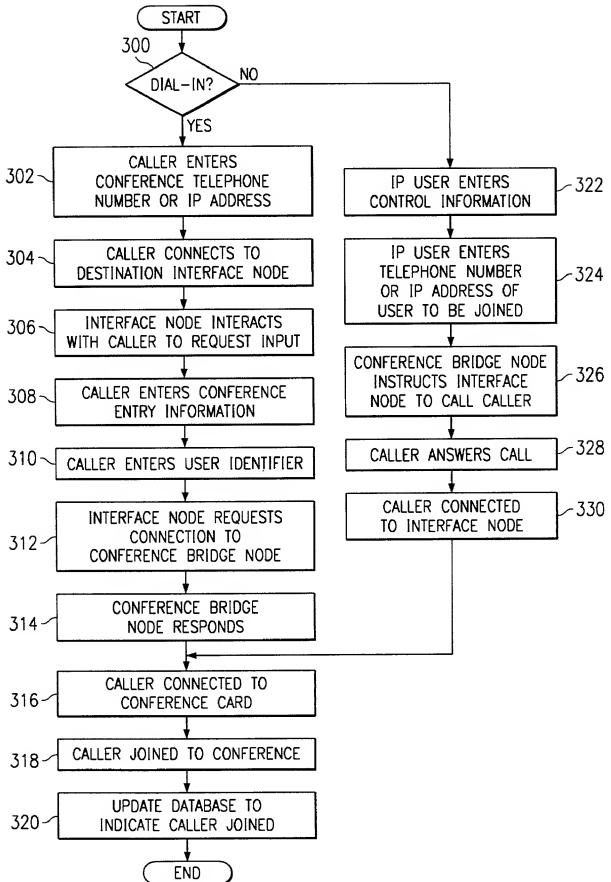


FIG. 7

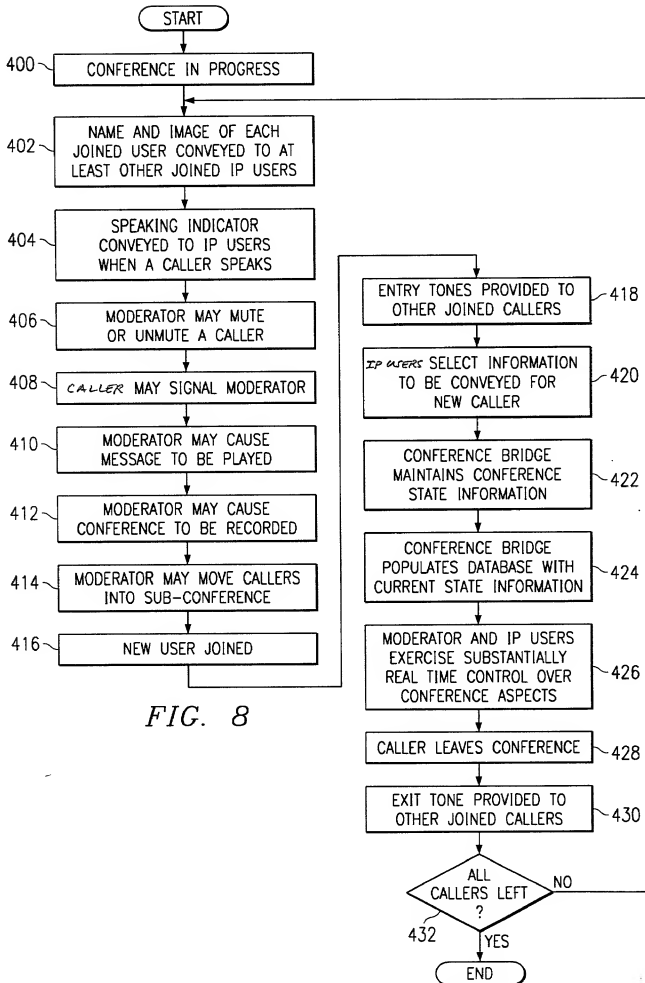

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention or design entitled INTERNET-ENABLED CONFERENCING SYSTEM AND METHOD ACCOMMODATING PSTN AND IP TRAFFIC, the specification of which is attached hereto; that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Priority Claimed (Yes) (No)</u>
---------------	----------------	-----------------------	--

-----NONE-----

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date

of the prior application(s) and the national or PCT international filing date of this application:

<u>Application Serial Number</u>	<u>Date Filed</u>	<u>Status</u>
-----NONE-----		

I hereby appoint:

James B. Arpin	Reg. No. 33,470
James L. Baudino	Reg. No. 43,486
Jeffery D. Baxter	Reg. No. P45,560
Samir A. Bhavsar	Reg. No. 41,617
William R. Borchers	Reg. No. 44,549
Robin A. Brooks	Reg. No. 44,563
Floyd B. Chapman	Reg. No. 40,555
Robert M. Chiaviello, Jr.	Reg. No. 32,461
Darren W. Collins	Reg. No. 44,625
David M. Doyle	Reg. No. 43,596
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Roger J. Fulghum	Reg. No. 39,678
Robert W. Holland	Reg. No. 40,020
Keiko Ichiye	Reg. No. P45,460
Wei Wei Jeang	Reg. No. 33,305
Jay B. Johnson	Reg. No. 38,193
Christopher W. Kennerly	Reg. No. 40,675
Robert A. King	Reg. No. 42,738
Tara D. Knapp	Reg. No. 43,723
Douglas M. Kubehl	Reg. No. 41,915
Ann C. Livingston	Reg. No. 32,479
James J. Maune	Reg. No. 26,946
Kevin J. Meek	Reg. No. 33,738
Harold E. Meier	Reg. No. 22,428
Jerry W. Mills	Reg. No. 23,005
Scott T. Morris	Reg. No. 43,818
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
Brian W. Oaks	Reg. No. 44,981
Scott F. Partridge	Reg. No. 28,142
Luke K. Pedersen	Reg. No. 45,003
James Remenick	Reg. No. 36,902
Barton E. Showalter	Reg. No. 38,302
T. Murray Smith	Reg. No. 30,222
Terry J. Stalford	Reg. No. 39,522
Matthew B. Talpis	Reg. No. 45,152
Rodger L. Tate	Reg. No. 27,399
David G. Wille	Reg. No. 38,363
Bradley P. Williams	Reg. No. 40,227

Patent Agents:

Brian A. Dietzel	Reg. No. 44,656
Kevin R. Imes	Reg. No. 44,795

all of the firm of Baker Botts L.L.P., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities under the Patent Cooperation Treaty.

Send Correspondence To:

Baker Botts L.L.P.
2001 Ross Avenue
Dallas, Texas 75201-2980

Direct Telephone Calls To:

Christopher W. Kennerly
at (214) 953-6812
Attorney Docket No. 067575.0103

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of first inventor

J. Larry Summers

Inventor's signature

Date

Residence (City, County, State)

Addison, Dallas County, Texas

Citizenship

United States of America

Post Office Address

14822 LeGrande Drive
Addison, Texas 75001

Full name of second inventor	Paul D. Harmon
Inventor's signature	_____
Date	_____
Residence (City, County, State)	Plano, Collin County, Texas
Citizenship	United States of America
Post Office Address	2029 Cannes Drive Plano, Texas 75025

Full name of third inventor	Trey H. Smith
Inventor's signature	_____
Date	_____
Residence (City, County, State)	Frisco, Collin County, Texas
Citizenship	United States of America
Post Office Address	7954 Tournament Road Frisco, Texas 75035